


FD6198E-A

FD6198E EIGHT-HEAD DYE SUBLIMATION PRINTER

INDUSTRIAL GRADE SPEED
370m²/h

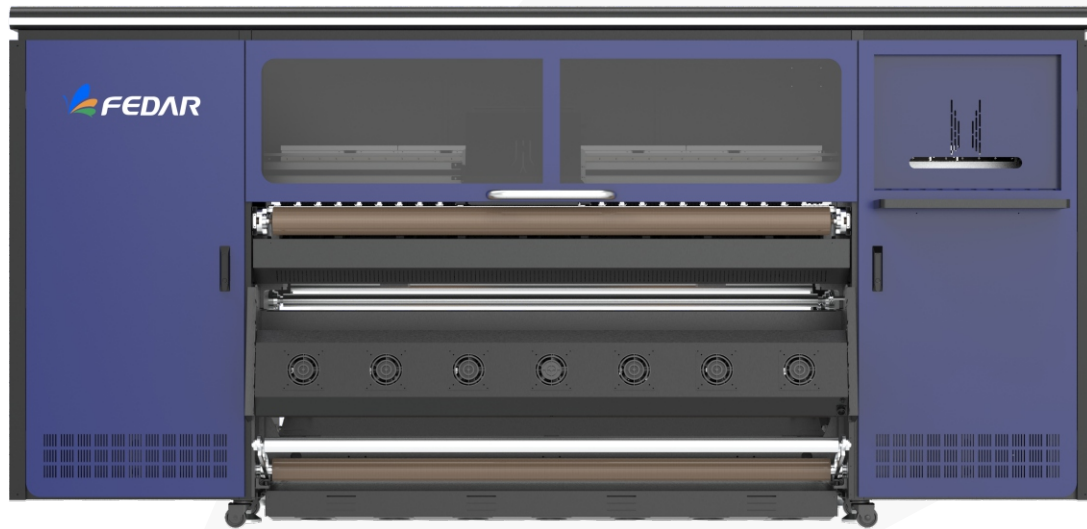

FUNCTIONS AND FEATURES

NEW APPEARANCE DESIGN

Appearance integrated structural design.



IMPORTED THK MUTE GUIDE RAIL

Japanese double THK mute guide rail, moving steadily, longer working life and reducing the resistance and noise of carriage moving during the high speed printing.



SPECIAL-DESIGNED PINCH ROLLERS

Adopt pneumatic pinch rollers lifting structure design.



INTEGRATED HEAD CAPPING STATION

Fully sealed capping station, auto cleaning, flash and moisturizing, easy to operate and maintain.



INK SUPPLY SYSTEM

Can be upgraded to expand 15-head model and automatic ink supply system. Upgradeable to 4/6 color printing.



INDUSTRIAL MOTOR

The feeding & take-up system is equipped with industrial motor, which adopts precise servo control to make paper moving more accurate.



ANTI COLLISION SYSTEM IN CARRIAGE

It is easy and convenient to adjust the printhead height according to different media. And anti collision system installed on both sides of carriage, which automatic detect any force on carriage way to protect the printhead inside.



INTELLIGENT DRYING CONTROL SYSTEM

Intelligent dryer unit, high stability and durability, and easy to operate.



PRINT YOUR DESIGN TRANSFER YOUR IDEA



LONGER LIFE




AUTO CLEANING



HIGH PERFORMANCE




HIGH STABILITY



HIGH EFFICIENCY



HIGH PRECISION

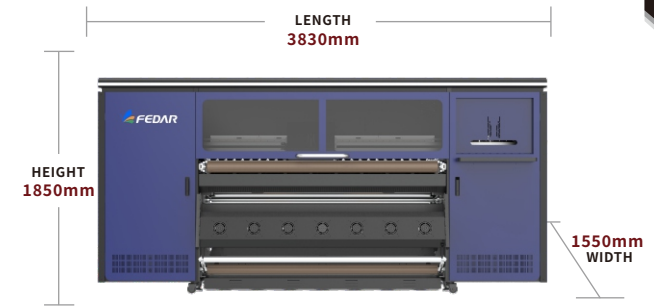

1900mm
PRINT WIDTH

CMYK
COLOR

I3200-A1
PRINTHEAD TYPE

TECHNICAL PARAMETERS

Model	FD6198E-A
Printhead	Type: EPSON I3200-A1 Printhead Printhead Quantity: 8, Nozzle Quantity: 3200
Print Speed <small>(Tested on linear printing without feather function)</small>	360*1200dpi 1PASS: 370m ² /h 360*2400dpi 2PASS: 185m ² /h
Ink Type	Type: Sublimation Ink, Color: CMYK(Optional 8 Colors)
Print Width	1900mm
Print Media	Transfer Paper
Media Transmit	Pinch Roller Mode
Dryer	Extra Intelligent Dryer Device
Moisture Mode	Full Seal Auto Moisture and Cleaning
Rip Software	Maintop, FlexiPRINT, ONYX, Neostampa and etc. Maintop7.0(Standard Equipped)
Image Format	JPG, TIF, PDF, etc.
Computer Configuration	Computer System: Win7 64Bits Win10 64Bits, Hard Disk: 500G or more RAM: 16G, GPU: ATI Mobility Memory 4G, CPU: Intel i7 Processor Transmission Interface: Giga-bit Ethernet Port
Standard Configuration	Intelligent Drying System Liquid Level Alarm System Waste Ink Alarm System
Working Environment	Temp.: 18°C-30°C, Humidity: 35%-65%
Power Supply	Input Voltage: 380VAC 15KW-37A
Machine Size	Dimension: 3830*1550*1850mm Packing: 3920*1150*2000mm

*The technical indicators and content of the machines are subject to the actual sales of the machine. The technical parameters and content of this brochure will be changed without further notice. The right of interpretation belongs to the manufacturer.